


## Power amplifier - PULSAR A 3000



The **ICA technology** incorporated in our amplifiers was developed by T+A with the aim of de-coupling the amplifier's input stage from the current amplifier stage. The result has been a clear improvement in the overall sound and in the spatial characteristics. The new push-pull class A mirror current stage is designed to cope with high-level signal processing, and features transistors with a transient frequency of more than 300 MHz. The result is virtually bottomless dynamic reserves, a vast bandwidth and tremendous speed. Naturally the A 3000 R can be used as a normal **stereo power amplifier**, but it can also be employed in other modes, e.g. for **bi-wiring**, or **bi-amping** in conjunction with other T+A power amplifiers. To protect the amplifier and the speakers connected to it an electronic circuit monitors the signals in the amplifier. This protective circuit is not located in the signal path, so it has absolutely no influence of any kind on the sound image. The circuit monitors the input signal before the output stage, and compares it with the output signal. If the slightest deviation occurs (clipping, distortion etc.) the circuit switches off the output relays. The protective circuit also trips if the outputs are shorted, or if the unit overheats.

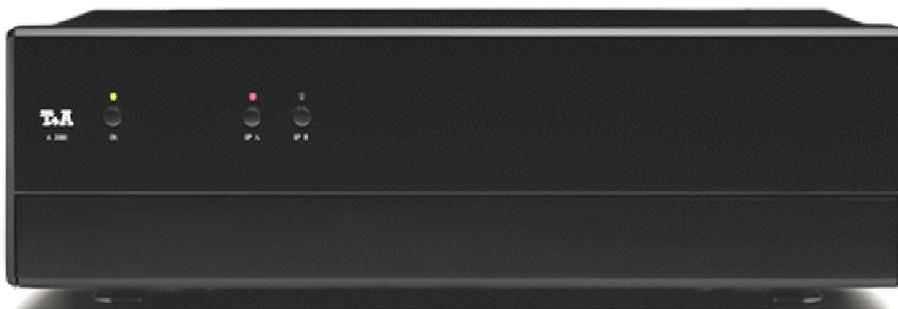

Internal view of the **A 3000**



The mains power supply of the **A 3000**

### Connection elements

<b>INPUT</b>	Asymmetrical amplifier input with an input sensitivity of 1 Veff.
<b>XLR</b>	Symmetrical amplifier input ( <b>XLR</b> ) with an input sensitivity of 1.55 Veff.
<b>SPEAKER A + B</b>	Two pairs of loudspeakers can be connected ( <b>SPEAKER A</b> and <b>SPEAKER B</b> ). The impedance of each speaker must not fall below 4 Ohm (DIN rating).
<b>CTRL</b>	If the power amplifier is operated with an (optional) remote-controlled pre-amplifier (e.g. <b>P 1220 R</b> ), then the <b>CTRL IN</b> socket should be connected to the pre-amplifier's <b>OUT CTRL</b> socket via the <b>RZ 001</b> remote control lead.
<b>RLink</b>	Interface for future system expansions

## Specifications

### Stereo operation

<i>Nominal output 8 Ohms</i>	190 Watts
<i>per channel, both 4 Ohms</i>	260 Watts
<i>2 Ohms</i>	410 Watts
<i>Peak output 8 Ohms</i>	200 Watts
<i>4 Ohms</i>	300 Watts
<i>2 Ohms</i>	500 Watts

### Bridged mono operation

<i>Nominal output 8 Ohms</i>	550 Watts
<i>4 Ohms</i>	800 Watts
<i>2 Ohms</i>	1100 Watts
<i>Peak output 8 Ohms</i>	650 Watts
<i>4 Ohms</i>	1000 Watts
<i>2 Ohms</i>	1750 Watts
<i>Power bandwidth</i>	1 Hz – 380 kHz
<i>Frequency response + 0 – 3 dB</i>	0,5 Hz – 420 Hz
<i>Slew rate, stereo</i>	100 V/us
<i>Slew rate, mono</i>	200 V/us
<i>Damping factor</i>	> 1000
<i>Signal: noise ratio (A-weighted)</i>	> 114 dB
<i>Total harmonic distortion</i>	< 0,001 %
<i>Inputs</i>	XLR, Cinch
<i>Reservoir capacity</i>	140000 uF
<i>Mains supply, 110 V or 220 / 240 V, 50 Hz</i>	1300 VA
<i>Dimensions</i>	15 x 44 x 39 cm
<i>Weight</i>	25 kg
<i>Colours</i>	Black (9005), Silver lacquer
<i>Remote control</i>	Via R system

*We reserve the right to alter technical specifications.*